



Weight 55kg/m²
 Module Width 300 - 1800mm
 Standard Module Height 600mm minimum, (increasing increments of 305mm)
 Intermediate heights are available

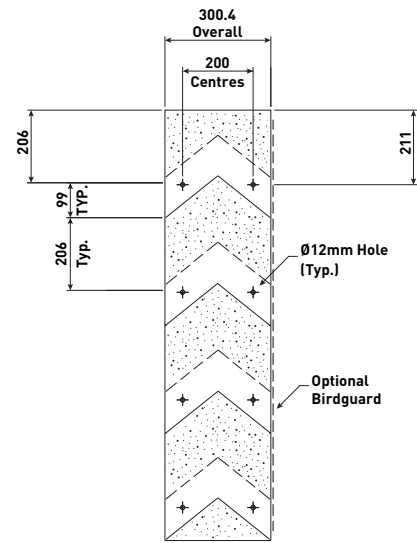


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	-	7	13	13	18	21	20	21
Acoustic Rating	R _w 18dB / D _{new} 29dB							

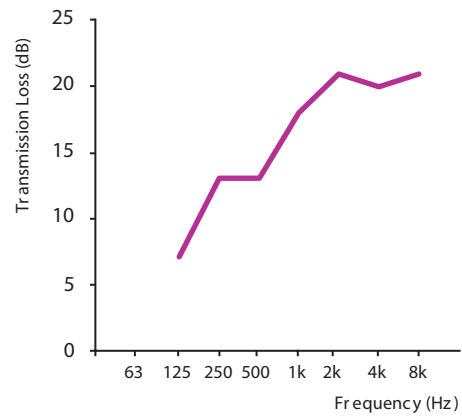

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.44	0.62	0.76	0.88	0.98	1.07	1.16	1.24	1.31	1.38
Nominal Free Area	32%* * Average over louvre depth									
Aerodynamic Coefficient	(k) 87.34									
Discharge Coefficient	0.107									

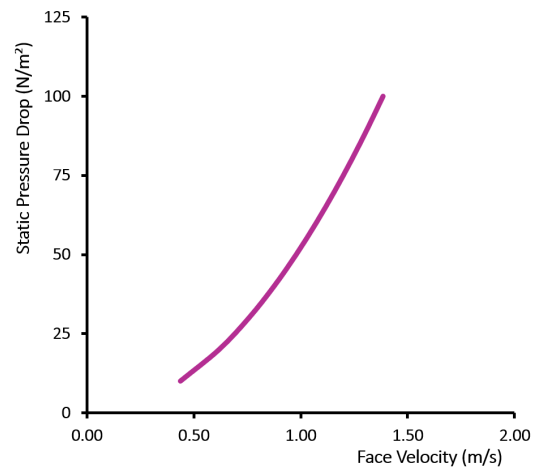

Pressure Drop = \dot{m}/Cd
 \dot{m} = mass flow
 Cd = Discharge Coefficient